


SL90 Ball Picker

Ball Deflector Repair (Round & Square Rod)



Call 1-800-869-1800 or go online at www.wittekgolf.com to order!

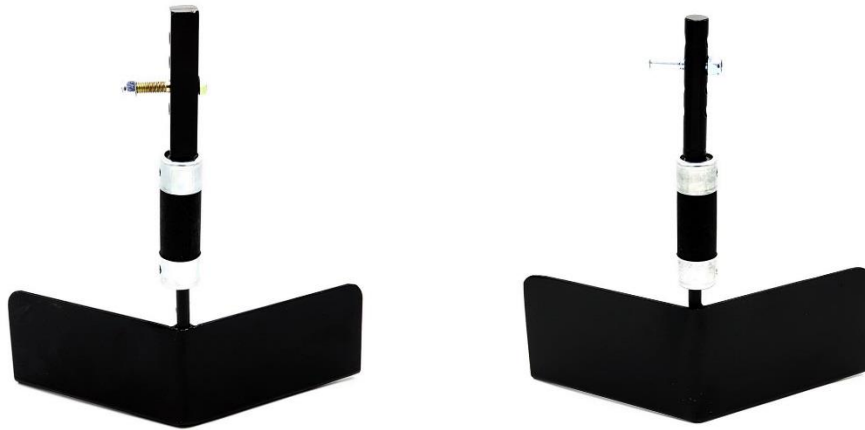

1. If you are replacing a broken coupling, you will receive this ½" flexible coupling (#M-719-105)



2. When placing it on the deflector, the coupling should sit about an index finger's width apart from the deflector itself. Any higher or lower and you run the risk of having the deflector drag too much or not work properly.



- The bolt to attach should go in the second hole from the top of the round or square rod as shown below. Any higher or lower and you run the risk of having the deflector drag too much or not work properly.

